








# GINEICO



## I-PIPEDI R55 SOFFITTO CEILING




	H	Kg	lm product/beam 3000K		CODE	Col.
			24°	36°		
6,8	300	1,07	330	450	PP011.9	/01 /02 /60 /99
	H	Kg	lm product/beam 3000K		CODE	Col.
			27°	46°		
12	300	1,07	1285	1289	PP013.9	/01 /02 /60 /99
18	300	1,07	1575	1579	PP014.9	/01 /02 /60 /99

● Kelvin 27 2700K F 27°  
● Beam 30 3000K 46°  
● Dimmable (optional) DFDImm. Taglio di Fase / Dimming/trailing/leading edge  
 40 4000K

	H	Kg	CODE	Col.
1x max 50	300	1,04	PP013	/01 /02 /60 /99

## I-PIPEDI R90 SOFFITTO CEILING

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



	H	Kg	lm product/beam 3000K		CODE	Col.
			24°	38°		
17	90	300	1827	1905	PP021.9	/01 /02 /60 /99
24,3	90	300	2356	2430	PP022.9	/01 /02 /60 /99


● Kelvin 27 2700K F 24°  
● Beam 30 3000K 38°  
● Dimmable (optional) Dali  
 40 4000K

	H	Kg	CODE	Col.
1x max 50	90	300	PP023	/01 /02 /60 /99

Accessori - accessories: L085#.A: Anello ø85 - Lens with ring ø85

## I-PIPEDI R120 SOFFITTO CEILING

Versione 17/24,3W base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



	H	Kg	lm product/beam 3000K		CODE	Col.
			24°	38°		
17	120	380	1827	1905	PP031.9	/01 /02 /60 /99
24,3	120	380	2356	2430	PP032.9	/01 /02 /60 /99
32	120	380	2885	2955	PP033.9	/01 /02 /60 /99

● Kelvin 27 2700K F 24°  
● Beam 30 3000K 38°  
● Dimmable (optional) Dali  
 40 4000K

Accessori - accessories: L0105#.A: Anello 105 - Lens with ring ø105




SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND  
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: [showroom@gineico.com](mailto:showroom@gineico.com)

[WWW.GINEICOLIGHTING.COM.AU](http://WWW.GINEICOLIGHTING.COM.AU)

## LT4201 I-Pipedi Ceiling VS

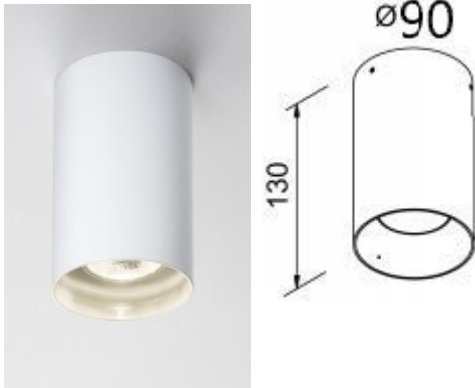

- **75W GU10 240V QPAR20**
- **Available in LED**
- **Available in White, Black, Cor-ten and Graphite. Custom colours available upon request.**
- **IP20 (also available in IP54 outdoor version)**

### LENTE CON ANELLO LENS WITH RING

Per proiettori da  $\varnothing 90$ . Aumenta l'altezza del prodotto di 10mm



	$\varnothing$ mm	Kg	CODE
LENTE SATINATA CON ANELLO / SATIN LENS WITH RING	85	0,02	L085S.A
	105	0,03	L105S.A



	$\varnothing$ mm	Kg	CODE
LENTE ELISSOIDALE CON ANELLO / ELIPSOID LENS WITH RING	85	0,02	L085E.A
	105	0,03	L105E.A



	$\varnothing$ mm	Kg	CODE
LENTE ASIMMETRICA CON ANELLO / ASYMMETRIC LENS WITH RING	85	0,02	L085A.A
	105	0,03	L105A.A



	$\varnothing$ mm	Kg	CODE
FILTRO NIDO D'APE / HONEY COMB LOUVER RING	85	0,02	L085R.A
	105	0,03	L105R.A

