



PIPEDINO DIRECT

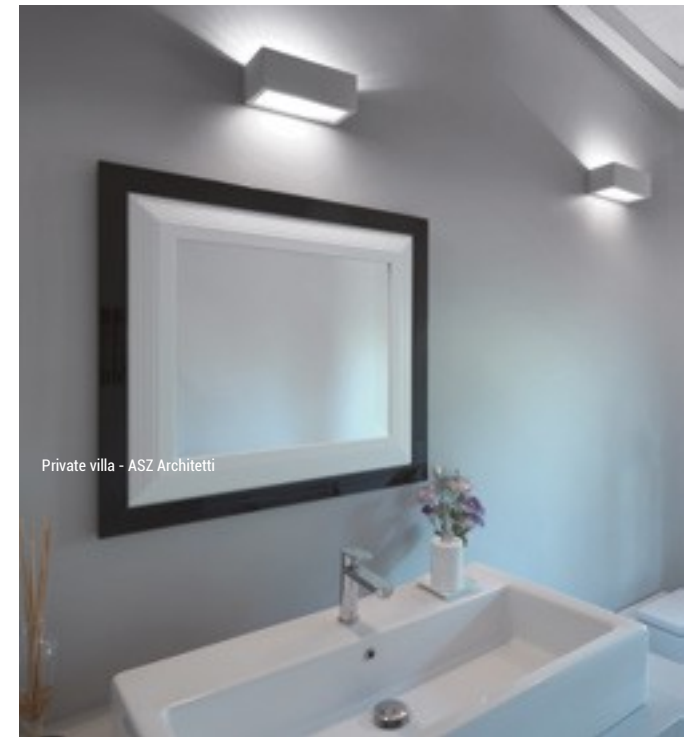

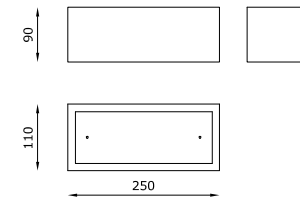



Private villa - ASZ Architetti

A luminaire whose goal is to give full power to the beauty of light, that enters the space with determination: Pipedino Direct is an indoor wall lamp in AirCorã a precious tool in the hands of the designer's mind.

A product that comes together with surfaces, exalting them: the light turns downwards, seeping in through the satin glass fixed with white polycarbonate screws.

TECHNICAL FEATURES

Code	2927.AC	2928.AC
Type	Wall lamp 	Wall lamp 
Material	AC: AirCoral	AC: AirCoral
Absorption capacity*	5.47 m ²	5.47 m ²
Mounting	Wall mounting	Wall mounting
IP rating	IP40	IP40
Insulation class	I	I
Control gear	Electronic ballast	Dimmable constant current driver
Lamp type	TC-DEL 	LED 350 mA 
Lamp wattage	1 x 26W	1 x 6.5W
Luminous efficacy	-	810 lm - 3000K
Light distribution	-	Wide beam 120°
Fitting	G24q-3	-
Light colour	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V • 50/60Hz	220-240V • 50/60Hz
CRI	-	>90
Emergency	-	-
Energy efficiency class	A	A*
Note	Extra white frosted glass fixed with polycarbonate screws.	Extra white frosted glass fixed with polycarbonate screws.

Trailing-edge and leading-edge dimming (20 - 100%).










PIPEDINO INDIRECT

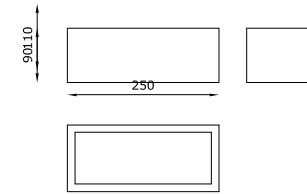

A luminaire that exalts the details, guiding the eye upwards: Pipedino Indirect is an indoor wall lamp in AirCoral allepiped that gives full power to light, the undisputed protagonist inside the architectural project. Enhancing, while playing with simmetries, with shapes and with an unparalleled visual power.



TECHNICAL FEATURES


Code	2937.AC	2936.AC
Type	Wall lamp 	Wall lamp 
Material	AC: AirCoral	AC: AirCoral
Absorption capacity*	5.47 m ²	5.47 m ²
Mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20
Insulation class	I	I
Control gear	Electronic ballast	Dimmable constant current driver
Lamp type	TC-DEL 	LED 350 mA 
Lamp wattage	1 x 26W	1 x 6.5W
Luminous efficacy	-	810 lm - 3000K
Light distribution	-	Wide beam 120°
Fitting	G24q-3	-
Light colour	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V • 50/60Hz	220-240V • 50/60Hz
CRI	-	>90
Emergency	-	-
Energy efficiency class	A	A*
Note	-	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included.







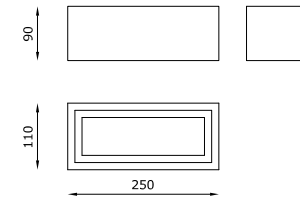


PIPEDINO OPEN



Pipedino Open is an indoor bi-emission wall lamp made of AirCoral emanates a concrete light, a uniform guide throughout walls. A diffused light distribution, symmetrical and regular; a direct and indirect light. Walls, ceilings and furniture all get to be enhanced in detail, thanks to a light that gives visual quality.



TECHNICAL FEATURES

Code	2921.AC	2922.AC	2924.EB.AC	2926.AC
Type	Wall lamp 	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral	AC: AirCoral	AC: AirCoral	AC: AirCoral
Absorption capacity*	5.09 m ²	5.09 m ²	5.09 m ²	5.09 m ²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I
Control gear	-	-	Electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 (75 mm) 	TC-DEL 	LED 350 mA 
Lamp wattage	1 x 100W max	1 x 150W max	1 x 26W	2 x 6.5W
Luminous efficacy	-	-	-	2 x 810 lm - 3000K
Light distribution	-	-	-	Wide beam 120°
Fitting	E27	R7s	G24q-3	-
Light colour	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz
CRI	-	-	-	>90
Emergency	-	-	-	-
Energy efficiency class	A*	A	A	A*
Note	-	-	-	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included.



product code	optional code	description	info
2920		Glass safety screen	Protection IP40