




## MINIVIRTUS IP65

code 3046.DC

Exterior wall unit, direct and indirect lighting emission  
 Body in DurCoral®  
 Inner core in cast aluminum  
 Extra white frosted glass diffuser  
 Aluminum reflector  
 Silicone gasket, internal stainless steel screws  
 Very high resistance to corrosion and UV rays  
 Paintable

DurCoral® the material for outdoor lighting  
 TWICE AS HARD AS CEMENT  
 vandal-proof, non-perishable, resistant to frost and weather  
 conditions, suitable for any type of finish and paint

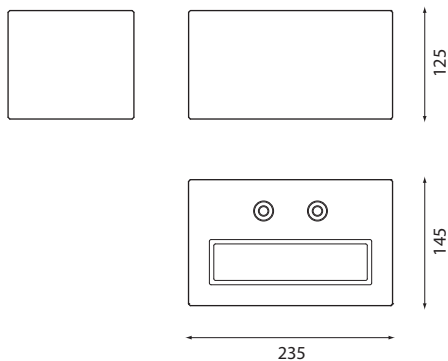

## TECHNICAL FEATURES

Type	Wall lamp
Material	DC: DurCoral®
Weight	4.7 Kg
Mounting	Wall mounting
IP rating	IP65
Control gear	Constant voltage LED driver
Lamp type	LED 24V
Lamp wattage	2 x 8.5W
Luminous efficacy	2 x 700 lm
Light distribution	Wide beam 120°
Fitting	-
Light Colour	White 3000K
Light Colour	White 2700K - 4000K (on request)
Voltage connection	220-240V · 50-60Hz
CRI	>80
Emergency	-
Energy efficiency class	A++



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.




## MINIVIRTUS IP65

code 3044.DC

Exterior wall unit, direct and indirect lighting emission  
 Body in DurCoral®  
 Inner core in cast aluminum  
 Extra white frosted glass diffuser  
 Aluminum reflector  
 Silicone gasket, internal stainless steel screws  
 Very high resistance to corrosion and UV rays  
 Paintable

DurCoral® the material for outdoor lighting  
 TWICE AS HARD AS CEMENT  
 vandal-proof, non-perishable, resistant to frost and weather  
 conditions, suitable for any type of finish and paint

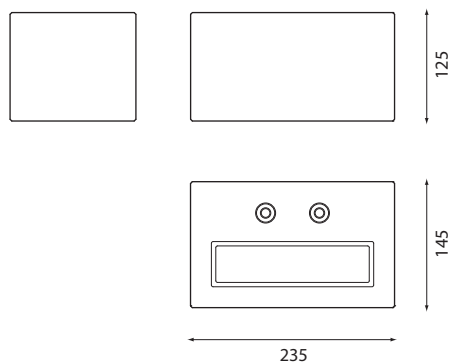

## TECHNICAL FEATURES

Type	Wall lamp
Material	DC: DurCoral®
Weight	4.7 Kg
Mounting	Wall mounting
IP rating	IP65
Control gear	Conventional ballast
Lamp type	TC-D
Lamp wattage	26W
Luminous efficacy	-
Light distribution	-
Fitting	G24d-3
Voltage connection	220-240V · 50-60Hz
Emergency	-
Energy efficiency class	A



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.