



RHINO

code 1841.00

Recessed flangeless luminaire.

Installation into plasterboard ceilings or walls.


Body in Coral®.

6W LED with lenses available (22° - 50°)

Adjustable light projector, 360° horizontally and 90° vertically.

Recessed position of the light projector to minimise visual impact.

Possibility of moving the light projector from the concealed recessed fitting.

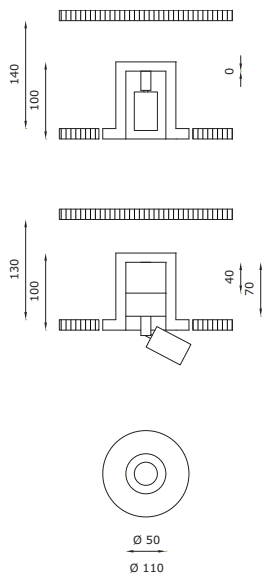

TECHNICAL FEATURES

Type	Tiltable downlight +/- 360°
Material	00: Coral®
Weight	0.8 Kg
Mounting	Wall and ceiling recessed
IP rating	IP40
Control gear	Constant current electronic driver
Cut out for plasterboard	Ø 120 mm
Lamp type	LED 500 mA
Lamp wattage	1x6W
Luminous efficacy	108 lm/W - 3000K
Light distribution	Wide beam 22°
Fitting	-
Light Colour	White 3000K
Light Colour	White 2700K (on request)
Light Hole	Ø 50 mm
Voltage connection	220-240V · 50-60Hz
CRI	>80 (>90 on request)
Emergency	-
Energy efficiency class	A++

OPTIONAL

H8500.A	Constant current electronic driver. Remote installation suitable for n°3 code 1841.00 - 500 mA
H8500.B	Constant current electronic driver suitable for n°2 code 1841.00 - 500 mA
H8500.C	Constant current electronic driver suitable for n°1 code 1841.00 - 500 mA
Lens	Available lens 50° on request
Available dimmable	PUSH or DALI, remote installation



FOR FURTHER INFORMATION PLEASE CONSULT THE GENERAL CATALOGUE BUZZI & BUZZI

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulations.