



Quasar

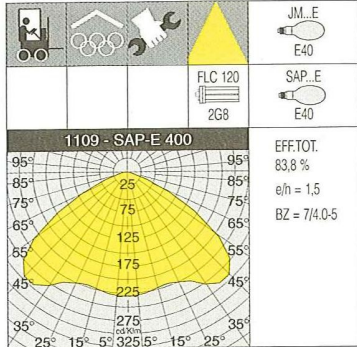

Housing: pressed steel.

Reflector: pressed prismatic aluminium 99.85, anodised (3 μ) and polished for higher luminous efficiency.

Coating: black polyester powder coating, resistant to corrosive and saline environments.

Wiring: 230V/50Hz power supply. Flexible wire terminated with quick-connect admiralty brass clamps, double silicone insulation, cross section: 1 sqmm. 2P+T terminal block (maximum allowed lead cross section 4 sqmm.)

1109 Quasar					
		CNR		CELL	
wattage	colour	weight	code	weight	code
JM-SAP-E 250	black	6.50	411043-00		
JM-E 400	black	6.50	411044-00		
SAP-E 400	black	7.90	411046-00		
FLC 120 P/E	s. silver			7.90	411047-00

Option to apply recessed mounting panel acc 1161 and acc. 1160 protection guard. FLC 120 P/E lamp feature: 4000K - 9000 lm.