



LENTI CON ANELLO

LENSES WITH RING



	ømm	Kg	CODE	Col.
LENTE SATINATA/SATINED LENS	55	0,01	L055S.A	/01 /02
LENTE ELLISSOIALE/ELIPOID LENS	55	0,01	L055E.A	/01 /02
LENTE ASIMMETRICA/ASYMMETRIC LENS	55	0,01	L055A.A	/01 /02



SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU

GINEICO



FOCUS MINI TRACK 24/48V



T26 TRACK
STANDARD TRACK



ARRETRATO
DEEP RECESSED TRACK





LED 24V e 48V		Im product/beam 3000K			CODE	Col.
W	ømm	Hmm	L.mm	27°		
5,7	26	85	166	571	FS501	Col. /01 /02 /03

Version (optional)	Kelvin	Beam	Dimmable (optional)
A Deep recessed track	27 2700K 30 3000K 40 4000K	F 27°	D Dali

T36 TRACK
STANDARD TRACK




ARRETRATO
DEEP RECESSED TRACK

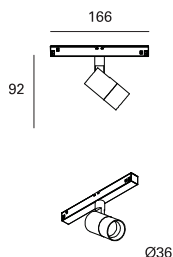



LED 24V e 48V		Im product/beam 3000K			CODE	Col.
W	ømm	Hmm	L.mm	19° 25° 18°x38°		
8	36	92	166	665 695 508	FS502	Col. /01 /02 /03

Version (optional)	Kelvin	Beam	Dimmable (optional)
A Deep recessed track	27 2700K 30 3000K 40 4000K	S 19° F 25° Z 18°x38°	D Dali

T55 TRACK
STANDARD TRACK



ARRETRATO
DEEP RECESSED TRACK

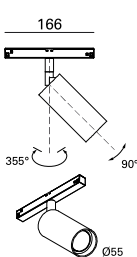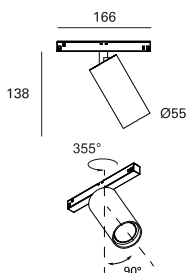

LED 48V		Im product/beam 3000K			CODE	Col.
W	ømm	Hmm	L.mm	27° 46°		
12,7	55	138	166	1285 1289	FS503	Col. /01 /02 /03
18,5	55	138	166	1575 1579		

Version (optional)	Kelvin	Beam	Dimmable (optional)
A Deep recessed track	27 2700K 30 3000K 40 4000K	F 27° W 46°	D Dali

Accessori - accessories: L055#A: Anello ø55 + lente - lens with ring ø55

PROJECTORS



SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU



2T26 TRACK
STANDARD TRACK



ARRETRATO
DEEP RECESSED TRACK



LED 48V		W			ømm	Hmm	L.mm	lm product/beam 3000K	27°	CODE	Col.
2	x 6,2	26	85	166	1142					FS551	.9 ● ● ● ●
A	Version (optional)	Deep recessed track	Kelvin	Beam	Dimmable (optional)						
			27 2700K	F 27°	D Dali						
			30 3000K								
			40 4000K								





2T36 TRACK
STANDARD TRACK




ARRETRATO
DEEP RECESSED TRACK





LED 48V		W			ømm	Hmm	L.mm	lm product/beam 3000K	19°	28°	18°x38°	CODE	Col.
2	x 8,7	36	92	166	1330	1390	1016					FS552	.9 ● ● ● ●
A	Version (optional)	Deep recessed track	Kelvin	Beam	Dimmable (optional)								
			27 2700K	S 19°	D Dali								
			30 3000K	F 28°									
			40 4000K	Z 18°x38°									



FOCUS 26

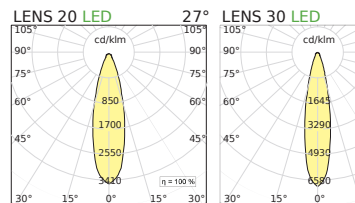

FOCUS 36



FOCUS 55

