

# GENIUS TWIN ROUND



**DOPPIA EFFICIENZA LUMINOSA E FACILE MANUTENZIONE. MECCANISMO PUSH-PULL.**


**DOUBLE LIGHT EFFICIENCY AND EASY MAINTENANCE, PUSH-PULL MECHANISM.**

Il design di Genius si raddoppia: Twin Genius, apparecchio da installazione a soffitto di cartongesso o laterizio. I due fori di emissione di soli 20 mm scompaiono completamente quando il prodotto è spento; ritagliati all'interno del controsoffitto, in perfetta continuità con la superficie generano coni luminosi dal volume netto che rompono l'oscurità.

The design of Genius doubles: Twin Genius, a totally disappearing recessed luminaire in AirCoral, installable on plasterboard or brick ceilings. The two emission holes of just 20 mm almost disappear when the product is switched off; cut out inside the ceilings, in perfect continuity with the surface, these products are able to generate bright cones of light with clean volumes, breaking the darkness.

La parte elettrica è estraibile direttamente dal foro luce con un semplice gesto della mano, grazie alla meccanica push-pull, che facilita l'estrazione e la sostituzione della sorgente LED in caso di manutenzione.

By a simple hand gesture, the electric part can be extracted directly from the front of the luminaire which allows the light to pour out. This is possible thanks to the push-pull mechanism, which makes the eventual extraction and replacement of the LED source easier in case of maintenance.

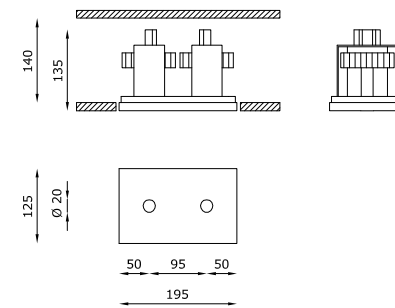

## TECHNICAL FEATURES

Code	1852AC	1857AC
Type	Downlight 90°	Downlight 90°
Material	AC: AirCoral	AC: AirCoral
Absorption capacity*	2.78 m <sup>2</sup>	2.78 m <sup>2</sup>
Weight	2 Kg	2 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter
Cut out for plasterboard	205 x 135 mm	205 x 135 mm
Lamp type	LED 700 mA VF: 2 x 11.5 VDC	LED 700 mA
Lamp wattage	2 x 8.5W	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K	2 x 1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALL, remote installation.	On request available dimmable PUSH or DALL, remote installation.

## OPTIONAL ACCESSORIES

product code	optional code	description	info
1852AC	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1852AC - 700 mA
	BR1852LT	Brick box	Dimensions L: 290 mm; W: 140 mm; D: 160 mm (instructions on page 502)
1857AC	BR1857LT	Brick box	Dimensions L: 290 mm; W: 140 mm; D: 160 mm (instructions on page 502)





SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND  
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: [showroom@gineico.com](mailto:showroom@gineico.com)

[WWW.GINEICOLIGHTING.COM.AU](http://WWW.GINEICOLIGHTING.COM.AU)



