GENIUS BASIC

LUCE RETROCESSA, INSTALLABILE IN 80 mm DI PARTE ELETTRICA ESTRAIBILE DALLA PARTE FRONTALE

RECESSED LIGHT, INSTALLABLE IN 80 mm OF ELECTRICAL PART, REMOVABLE FROM THE FRONT

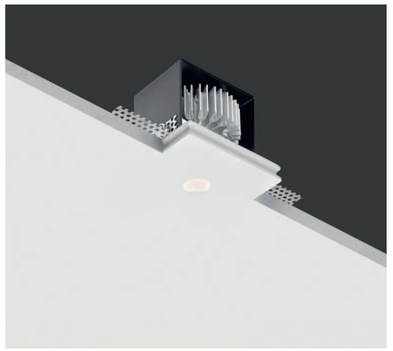

Genius Basic



OTHER AVAILABLE CODES

1885.00 4 R 24 E _ WD	*lens*	24°	
	light colour		
	27	2700K	
	30	3000K	
	40	4000K (on request)	
1885.00 4 R 40 E _ WD	*lens*	40°	
	light colour		
	27	2700K	
	30	3000K	
	40	4000K (on request)	
emergency			
1886.00 4 R 24 E _ WD	*lens*	24°	
	light colour		
	27	2700K	
	30	3000K	
	40	4000K (on request)	
example of code composition	1885.00 4 R 24 E **30** WD		

GENIUS BASIC IP65
see page **348**

TECHNICAL FEATURES

	1885.00 XX	**1886.00** XX emergency
Code		
Type	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	100 × 100 mm	100 × 100 mm
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA
Lamp wattage	1 × 4.5W	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K	1 × 540 lm - 3000K
Light distribution	Wide beam 24° I 40°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A^{++}	A^{++}
Note	-	-

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1885LT	cod. BR1886LT

For further info and other available drivers please see page 407

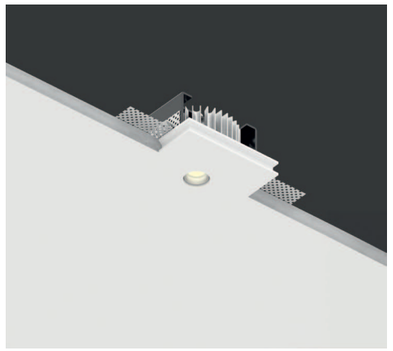





Genius Basic Flat

OTHER AVAILABLE CODES

1887.00 4 R 24 E _ WD

lens 24°

light colour

27	2700K
30	3000K
40	4000K (on request)

emergency

1888.00 4 R 24 E _ WD

lens 24°

light colour

27	2700K
30	3000K
40	4000K (on request)

example of code composition: 1887.00 4 R 24 E **30** WD

Genius Basic Flat is the most **space-saving** of the Genius family, **installed in just 50 mm**. The electrical part can be pulled out directly from the light hole.

TECHNICAL FEATURES

	1887.00 XX	**1888.00** XX emergency
Code		
Type	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	100 × 100 mm	100 × 100 mm
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA
Lamp wattage	1 × 4.5W	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K	1 × 540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	-	-

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1887LT	cod. BR1888LT

For further info and other available drivers please see page 407

Abks Break Time, Milan I ph. Le Michétte Creative Studio

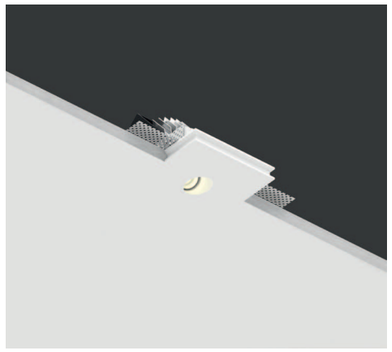



Genius Basic Slope

OTHER AVAILABLE CODES

1865.00 4 R 24 E _ WD — *lens* 24°

light colour

27	2700K
30	3000K
40	4000K (on request)

emergency

1866.00 4 R 24 E _ WD — *lens* 24°

light colour

27	2700K
30	3000K
40	4000K (on request)

example of code composition: 1865.00 4 R 24 E **30** WD

TECHNICAL FEATURES

	1865.00 XX	**1866.00** XX emergency
Type	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included), inverter (included)
Cut out for plasterboard	100 × 100 mm	100 × 100 mm
Lamp type	LED 700 mA Vf: 6.5 VDC	LED 700 mA
Lamp wattage	1 × 4.5W	1 × 4.5W
Luminous efficacy	1 × 540 lm - 3000K	1 × 540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A^{++}	A^{++}
Note	-	-

OPTIONAL

ON/OFF driver	cod. H8700.E	cod. H8700.E
Trailing and leading edge driver	cod. DRV0000087	cod. DRV0000087
DALI dimmable LED driver	cod. DRV0000030	cod. DRV0000030
PUSH dimmable LED driver	cod. DRV0000027	cod. DRV0000027
PUSH/1-10V/DALI dimmable LED driver	cod. DRV0000094	cod. DRV0000094
Brick box	cod. BR1865LT	cod. BR1866LT

For further info and other available drivers please see page 407

Genius Basic Slope is a recessed downlight with an asymmetrical light hole, with a **40° inclined axis**, with the possibility of **wall-washer effect**. It can be installed on ceilings or wall, as a step marker. **Rear recess of 80 mm**.

SUPERFUTUREDESIGN*

FORO LUCE ASIMMETRICO
CON ASSE INCLINATO DI 40°

ASYMMETRICAL LIGHT HOLE
WITH 40° SLOPING AXIS