
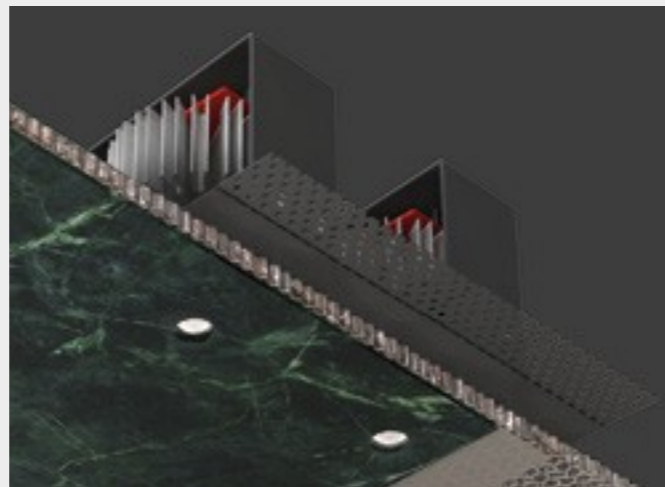
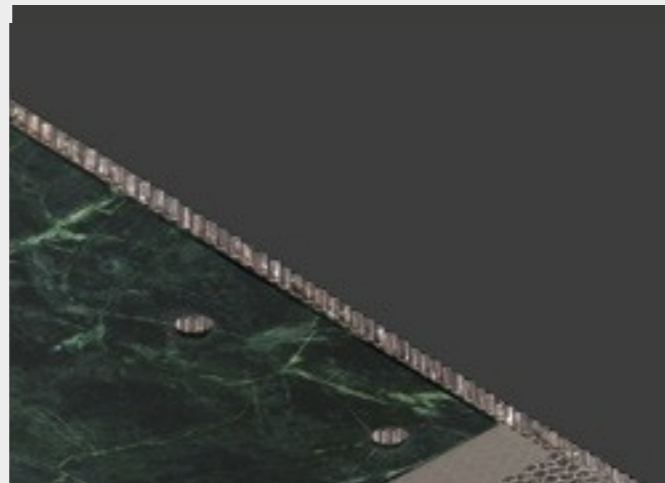


TWIN GENIUS NAKED

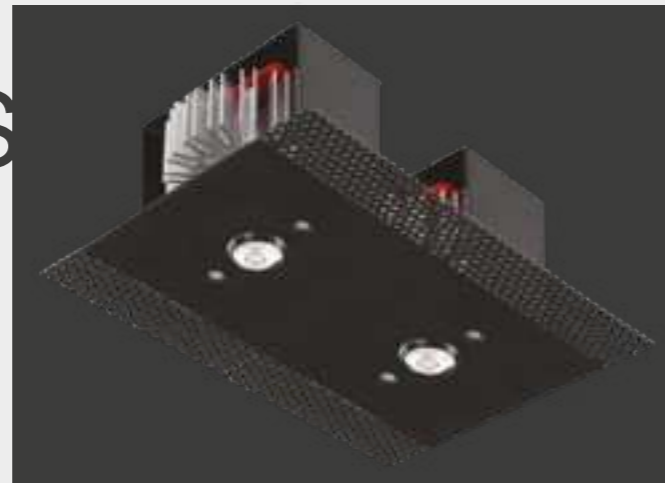


UN GENIUS PER QUALSIASI MATERIALE.

Il design di Genius si raddoppia: Twin Genius, apparecchio da interni a scomparsa totale per installazione a soffitto, che vive ora nella sua versione "Naked", estendendo il concetto di totale integrazione superficiale a qualsiasi materiale e superficie. Dotato di due fori di emissione da soli 20 mm, l'apparecchio scompare completamente quando spento, grazie alla totale integrazione con le superfici in cui è installato: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 5 mm ad un massimo di 20 mm. L'elettronica mantiene le prestazioni del Genius, con la parte elettrica estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

A GENIUS FOR ANY MATERIAL.

The Genius design has been doubled: Twin Genius, a totally recessed indoor luminaire for ceiling mounting, now available in its "Naked" version, extending the total surface integration concept to any material and surface. Fitted with two light emission holes measuring only 20 mm (0.79"), the luminaire disappears completely when it is switched off, thanks to its total integration with the surfaces on which it is installed: wood, cement, mirror, marble and industrial modules with a thickness from 5 mm (0.2") to a maximum of 20 mm (0.79"). The electronics retain the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, so there is no need for any inspection hatch, nor for invasive maintenance operations.

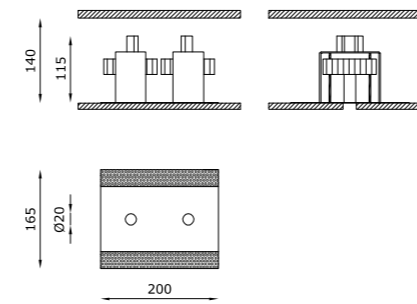

CODE COMPOSITION

1065 BL 4 R 40 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
1066 BL 4 R 40 E _ ND	<i>light colour</i>	
	27	2700K
	30	3000K
	40	4000K
example of code composition	1065 BL 4 R 40 E 30 WD	

TECHNICAL FEATURES

Code	1065 XX	1066 XX
Type	Downlight 90° 	Downlight 90°
Material	Aluminum Steel	Aluminum Steel
Finishing	Black	Black
Weight	1.3 Kg	1.3 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA Vf: 2 x 11.5 VDC	LED 700 mA
Lamp wattage	2 x 8.5W	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K	2 x 1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V • 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A**	A**
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.
	Suitable for installation on surfaces max 20 mm deep.	Suitable for installation on surfaces max 20 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1065 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1065 XX - 700 mA