




FILE FLEX CIRCLE

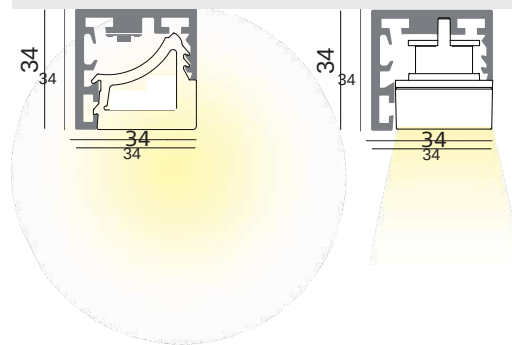

AVAILABLE VERSION

- **KELVIN** ○ **KELVIN**
- 27** 2700K **30** 3000K
- 30** 3000K **40** 4000K
- 40** 4000K




● **FASCIO** **RAM**

- S** Spot 20°
- F** Flood 32°
- W** Wide 50°




● **DIMMABLE** (OPTIONAL)

- D** Dali Touch & Dimm
- D10** Dimmerabile 1-10V / Dimmable 1-10V





FINISHING

-  **/01** bianco | white
-  **/02** nero | black
-  **/36** oro | gold

PREMIUM FINISHING


-  **/81** oro rosa shine/shine rose gold
-  **/82** bronzo/ bronze
-  **/83** ottone spazzolato/ brushed brass

MODEL WITH LEVA



-  **/01** telaio bianco, ottica nera | white frame, black optic
-  **/02** telaio nero, ottica nera | black frame, black optic
-  **/41** telaio bianco, ottica bianca | white frame, white optic
-  **/42** telaio nero, ottica oro | black frame, gold optic

HOW TO CREATE THE CODE: ● ● ● **###** **01 F1000.827S**

CODE
F1000.8 ● ● ● — finishing **##**
 | | | |
 base code kelvin beam dimmable

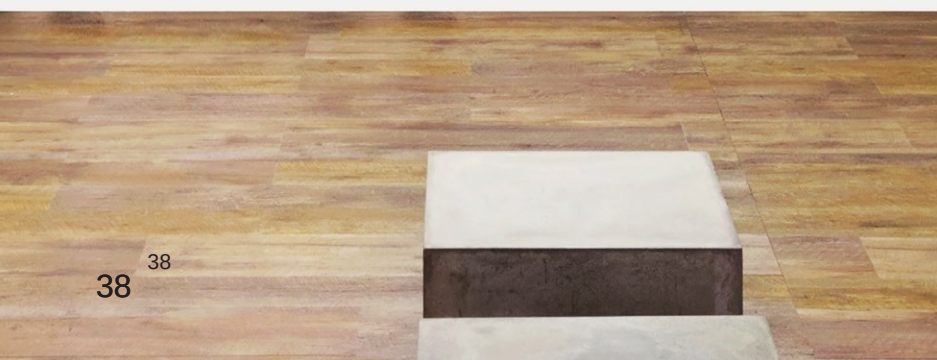

FILE FLEX CEILING - 24V
DIRECT AND DIFFUSED LIGHT



LED


W	Ø	Kg	lm/Prod. 3000K	CODE
33	500	2,5	1886	FXA31.8##
53	800	3,9	3068	FXA32.8##
67	1000	4,8	3860	FXA33.8##
81	1200	5,9	4666	FXA34.8##
101	1500	8,0	5880	FXA35.8##
121	1800	8,9	7068	FXA36.8##
169	2500	12,2	9867	FXA37.8##
203	3000	14,8	11887	FXA38.8##

Note: Da completare con alimentatore | To be completed with power supply
Il prodotto di diametro 2500/3000 verrà consegnato in 2 o più parti assemblabili | Please note the products of 2500/3000 diameter will be delivered in 2 or more parts.

FILE FLEX CIRCLE CEILING - 48V
DIRECT LIGHT




34

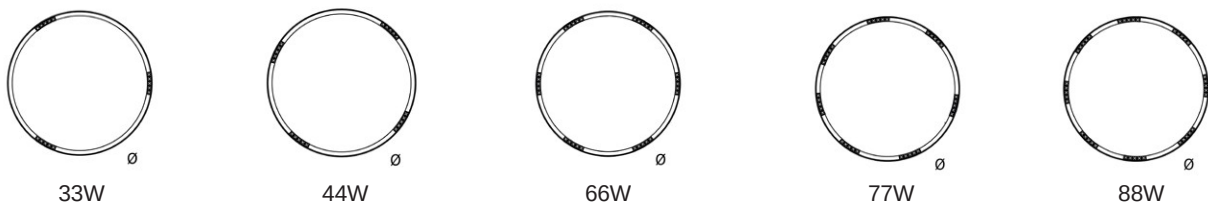

LED

W	Ø	Kg	lm product/beam 3000K S 20° F 32° W 50°	CODE
33	500	2,4	3000 2793 2484	FXC01.9●●/##
44	800	3,8	4000 3724 3312	FXC02.9●●/##
66	1000	4,7	6000 5586 4968	FXC03.9●●/##
77	1200	5,8	7000 6517 5796	FXC04.9●●/##
88	1500	7,9	8000 7448 6624	FXC05.9●●/##

Da completare con alimentatore | To be completed with power supply
Per le versioni D e D10 abbinare driver 48V ON/OFF. | For versions D and D10 combine 48V ON / OFF drivers



DRIVERS VESPEP.447 **24V** **48V**