


LED COVEA 19.2W



CODE	WATTS	LUMENS	CONTROL GI	EARXING METH	юсст	VOLTS
COVE	19.2W	1700lm/m	External (Remote)	Recessed	2700- 5000K	24V
DESCRIPTION	DIMMABL	EDIMMENSIO	ISBEAM ANGI	E IP RATING	CRI	FINISH
LED round aluminium profile, PMMA* opal diffuser. Recessed into ceiling and providing continuous reflected illuminated cove	DALI	48	90°	IP40	>92	White Silver

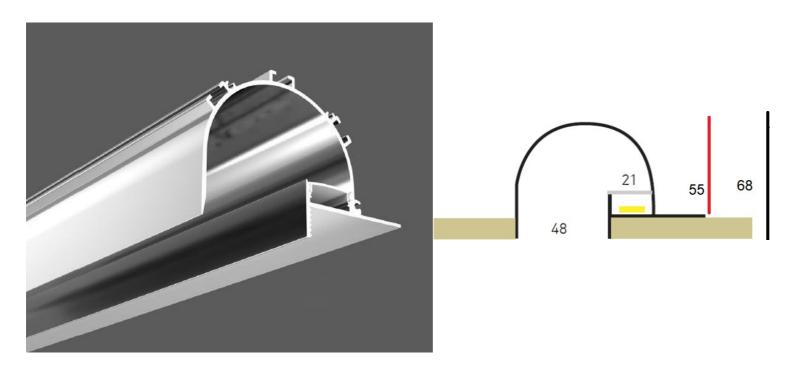