

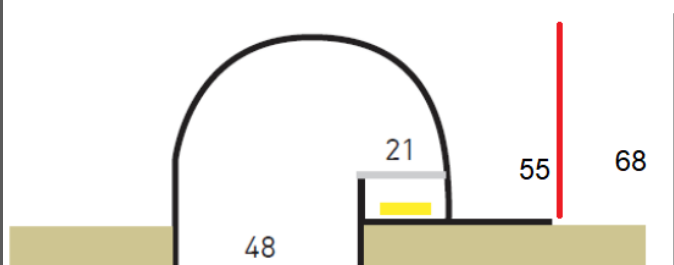


LED COVEA 19.2W

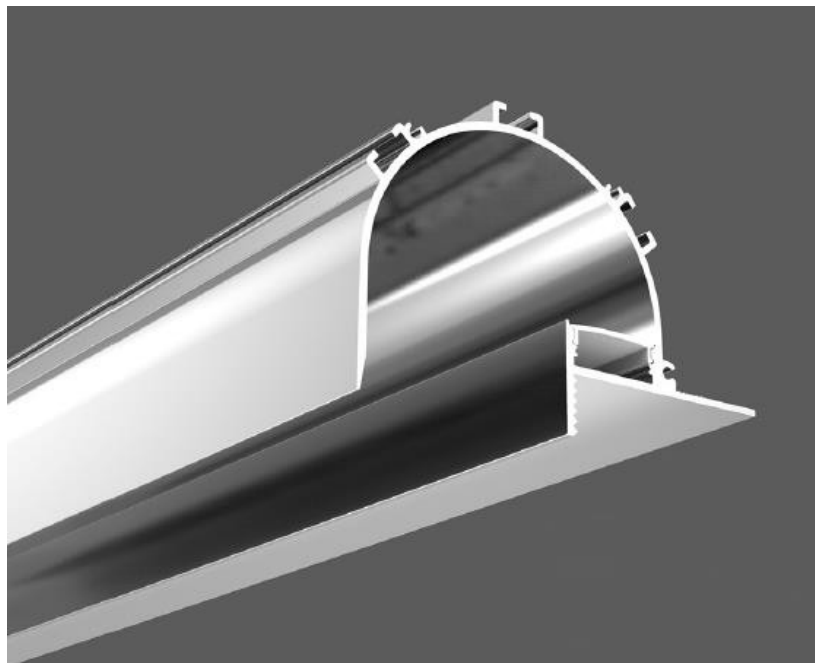

CODE	WATTS	LUMENS	CONTROL GEAR	FIXING METHOD	CCT	VOLTS
COVEA	19.2W	1700lm/m	External (Remote)	Recessed	2700-5000K	24V
DESCRIPTION	DIMMABLE	DIMMENSIONS	BEAM ANGLE	IP RATING	CRI	FINISH
LED round aluminium profile, PMMA* opal diffuser. Recessed into ceiling and providing continuous reflected illuminated cove	DALI TRIAC 0-10V		90°	IP40	>92	White Silver

*PMMA Polymethyl methacrylate



(+61) 407 950 455
showroom@gineico.com