
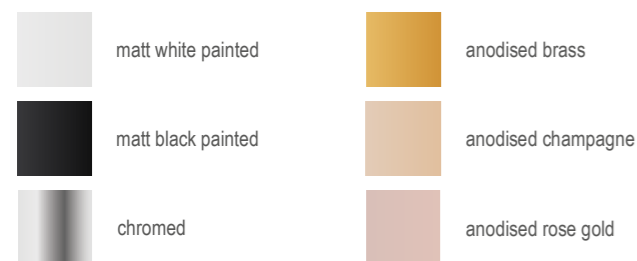


Q4 48V

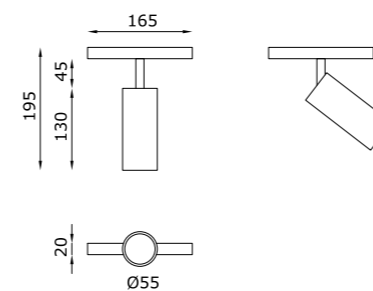

CODE COMPOSITION

T048 L 00008	0		
		dimmiability	
	ND	non dimmable	
	DA	DALI	
	11	1-10V	
		light colour	
	27	2700K	
	30	3000K	
		lens	
	14	14°	
	35	35°	
	55	55°	
		finishing	
	W1	white	
	B1	black	
	CP	chromed	
	BR	brass	
	A1	champagne	
	A2	rose gold	

example of code composition T048 L 00008 W1 14 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00008 XX
Type	Projector ± 360° / ± 90° 
Material	Aluminum
Finishing	White Black Chromed Brass Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED 
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 35° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	Black tige for Q4 48V chromed, anodised brass, anodised champagne and anodised rose gold.

Q4 48V per binario a 48V è un apparecchio per interni che garantisce il minimo impatto visivo, completamente orientabile a 360°, è disponibile in più varianti ottiche.

Proiettore ad alte performance in alluminio disponibile in diverse finiture: nero, bianco, cromo, ottone, anodizzato champagne e rose gold.



Il proiettore Q4 ha sorgente luminosa a LED (COB) CRI 90, 3000K (2700K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore a binario.

The Q4 48V 48V track projector is a fitting for interiors which guarantees minimum visual impact. 360° completely adjustable. It is available in a variety of optics. A projector with high performances in aluminium available in various finishes: black, chromed, brass, anodised champagne and rose gold.

The Q4 projector has an LED (COB) CRI >90, 3000K (2700K light source on request) fed in direct current with incorporated convertor located inside the track.



Q4 220V

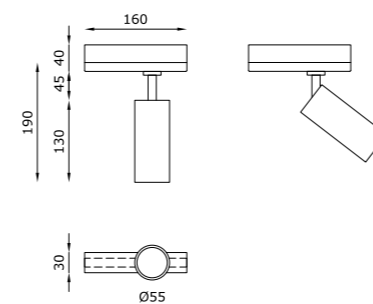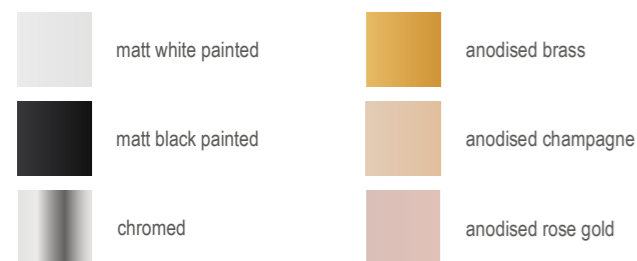

CODE COMPOSITION

T220 L 00008	0	
		dimmiability
	ND	non dimmable
	DA	DALI
		light colour
	27	2700K
	30	3000K
		lens
	14	14°
	35	35°
	55	55°
		finishing
	W1	white
	B1	black
	CP	chromed
	BR	brass
	A1	champagne
	A2	rose gold

example of code composition T220 L 00008 W1 14 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00008 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 35° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

Black tige for Q4 220V chromed, anodised brass, anodised champagne and anodised rose gold.

Proiettore per binario 220V con sorgente luminosa a LED (COB) CRI 90, alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del prodotto. Q4 220V è un apparecchio per interni che garantisce il minimo impatto visivo, completamente orientabile a 360°, è disponibile in più varianti ottiche. Proiettore ad alte performance in alluminio verniciato a polvere disponibile in diverse finiture: bianco, nero, cromo, brass, anodizzato champagne e rose gold.

Projector for 220V track for LED (COB) CRI 90, 3000K (2700K light source on request) supplied in direct current with recessed converter located inside the product's adaptor. Q4 220V is a light fitting for interiors which guarantees minimum visual impact, completely adjustable at 360°; it is available in a variety of optics. High performance projector in powdered varnish aluminium available in various finishes: black, white, chromed, brass, anodised champagne and rose gold.



SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455
Email: showroom@gineico.com
WWW.GINEICOLIGHTING.COM.AU