






THE TUBE




-  matt white painted
-  matt black painted
-  chromed
-  anodised champagne
-  anodised rose gold



The Tube è una lampada a sospensione dal design minimale, il suo diametro di soli 15 mm la rendono estremamente essenziale, discreta, elegante nelle forme. Ha un output luminoso in grado di valorizzare ogni dettaglio, disponibile in diverse colorazioni. È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.

The Tube is a pendant light with a minimal design. Its diameter of only 15 mm makes it extremely clean-cut, discrete and elegant in shape. It has a light output that can enhance every detail and is available in different colours. It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.

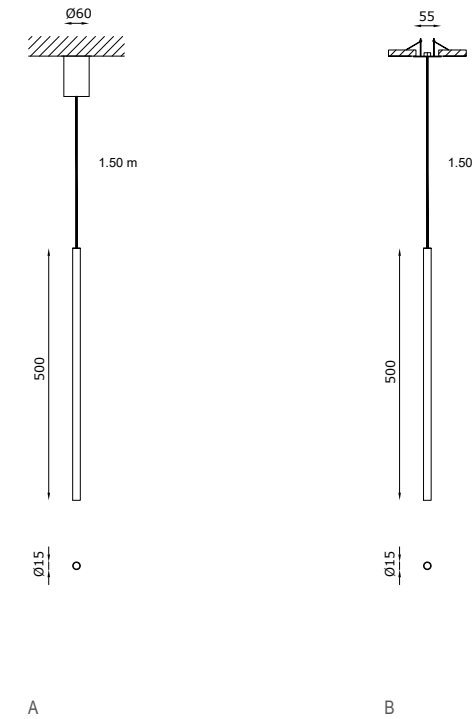

CODE COMPOSITION

1131_4 S 00 E _ND	
light colour	
27	2700K
30	3000K
finishing	
WH	white
BL	black
CP	chromed
A1	champagne
A2	rose gold

1132_4 S 00 E _ND	
light colour	
27	2700K
30	3000K
finishing	
WH	white
BL	black
CP	chromed
A1	champagne
A2	rose gold

example of code composition

1131 WH 4 S 00 E 27 ND

TECHNICAL FEATURES

	1131 XX (fig. A)	1132 XX (fig. B)
Code	1131 XX (fig. A)	1132 XX (fig. B)
Type	Suspension lamp	Suspension lamp
Material	Aluminum	Aluminum
Finishing	White Black Champagne Rose Gold	White Black Champagne Rose Gold
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Dimmable electronic driver on board (included)	Dimmable electronic driver, remote installation (included)
Cut out for plasterboard	-	Ø 45 mm
Lamp type	LED	LED
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	360 lm - 3000K	360 lm - 3000K
Light distribution	Narrow beam	Narrow beam
Fitting	-	-
Light colour	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A**	A**
Note	Black ceiling box with driver on board.	Black recessed canopy with remote driver.
	Black silicon cable (L 1.5 m). On request different lenght.	Black silicon cable (L 1.5 m). On request different lenght.

