




PIPEDO



La geometria è il punto di partenza per la realizzazione di un prodotto. *Detail is the starting point to create a product with a clean and minimal design pulito e minimale: Pipedo è una lampada a parete da interno che genera una luce indiretta, rivolta verso l'alto con il preciso obiettivo di accendere e portare a nuova vita i dettagli più nascosti.*

La luce diventa materia con cui plasmare gli ambienti, elemento *Concrete comes substance to mould spaces with, a concrete element for an optimal visual quality.*

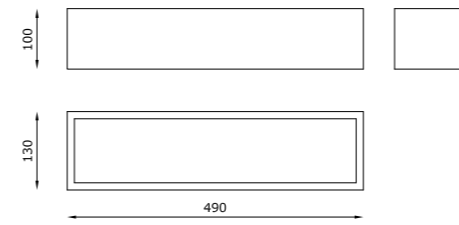

Surface

TECHNICAL FEATURES

Code	2901.AC	2902.AC	2904.EB.AC	2906.AC	2907.PAC	2908.AC
Type	Wall lamp	Wall lamp	Wall lamp	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral	AC: AirCoral	AC: AirCoral	AC: AirCoral	AC: AirCoral	AC: AirCoral
Absorption capacity*	13.31 m ²	13.31 m ²	13.31 m ²	13.31 m ²	13.31 m ²	13.31 m ²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I	I	I
Control gear	-	-	Electronic ballast	Electronic ballast	Dimmable electronic ballast	Dimmable constant current driver
Lamp type	A 60	QT-DE12 (115 mm)	TC-L	TC-L	TC-L	LED 350 mA
Lamp wattage	1x100W max	1x150W max	1x36W	1x36W	1x36W	1x8W
Luminous efficacy	-	-	-	-	-	1340 lm - 3000K
Light distribution	-	-	-	-	-	Wide beam 120°
Fitting	E27	R7s	2G11	2G11	2G11	-
Light colour	-	-	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
CRI	-	-	-	-	-	>90
Emergency	-	-	-	1 hour	-	-
Energy efficiency class	A	A	A	A	A	A
Note	-	-	-	-	Standard dimmable switch dim. / push (on request: dimmable 1-10V or DALI).	Trailing edge and leading edge dimming (20 - 100%). Satin glass included.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2904.EB.AC / 2906.AC / 2907.PAC	2900	Glass safety screen	Protection IP40

