


PIPEDO

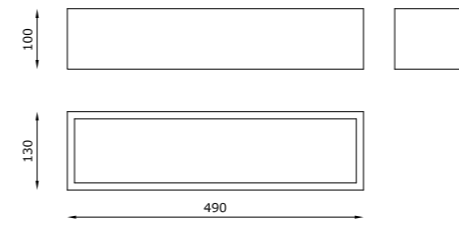

Geometry is the starting point to create a product with a clean and minimal design: Pipedo is an indoor wall lamp made of AirCora® that emits an indirect light, facing upwards and with a precise goal, to highlight and bring new life to the most hidden details.
Light becomes substance to mould spaces with, a concrete element for an optimal visual quality.

TECHNICAL FEATURES

Code	2901.AC	2902.AC	2904.EB.AC	2906.AC	2907.P.AC	2908.AC
Type	Wall lamp	Wall lamp	Wall lamp	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCoral	AC: AirCoral	AC: AirCoral	AC: AirCoral	AC: AirCoral	AC: AirCoral
Absorption capacity*	13.31 m²	13.31 m²	13.31 m²	13.31 m²	13.31 m²	13.31 m²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I	I	I
Control gear	-	-	Electronic ballast	Electronic ballast	Dimmable electronic ballast	Dimmable constant current driver
Lamp type	A 60 	QT-DE12 (115 mm) 	TC-L 	TC-L 	TC-L 	LED 350 mA
Lamp wattage	1 x 100W max	1 x 150W max	1 x 36W	1 x 36W	1 x 36W	1 x 8W
Luminous efficacy	-	-	-	-	-	1340 lm - 3000K
Light distribution	-	-	-	-	-	Wide beam 120°
Fitting	E27	R7s	2G11	2G11	2G11	-
Light colour	-	-	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz
CRI	-	-	-	-	-	>90
Emergency	-	-	-	1 hour	-	-
Energy efficiency class	A*	A	A	A	A	A*
Note	-	-	-	-	Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2904.EB.AC / 2906.AC 2907.P.AC	2900	Glass safety screen	Protection IP40





SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com





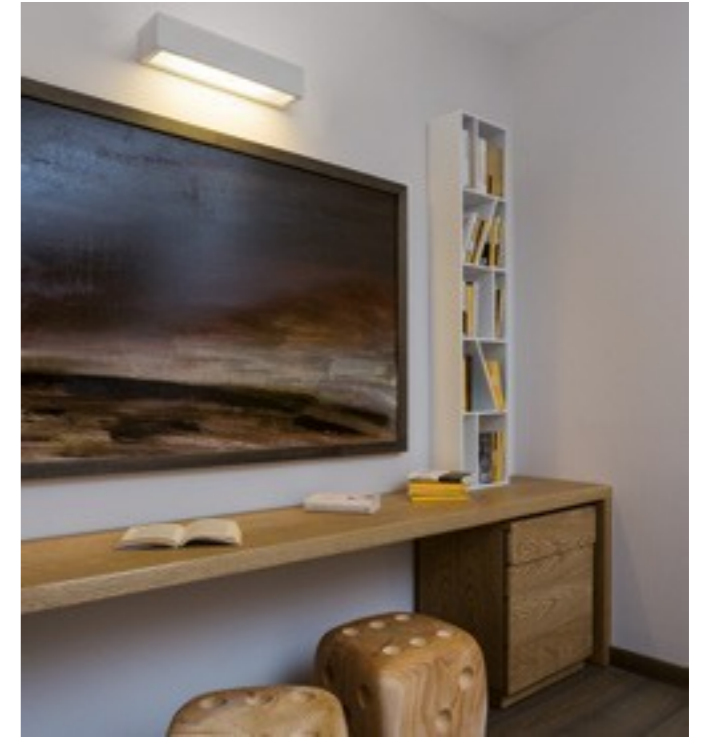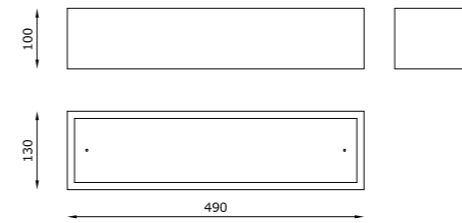

WWW.GINEICOLIGHTING.COM.AU

PIPEDO DIRECT



Pipedo Direct is an indoor wall lamp made of **AirCoral** that emits a direct and delicate light thanks to the presence of the satin glass fixed with white polycarbonate screws. This allows a functional, effortless and comfortable use, ensuring the best possible vision.

TECHNICAL FEATURES

Code	2964.EB.AC	2965.AC	2968.AC
Type	Wall lamp 	Wall lamp 	Wall lamp 
Material	AC: AirCoral	AC: AirCoral	AC: AirCoral
Absorption capacity*	13.31 m ²	13.31 m ²	13.31 m ²
Mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP40	IP40	IP40
Insulation class	I	I	I
Control gear	Electronic ballast	Dimmable electronic ballast	Dimmable constant current driver
Lamp type	TC-L 	TC-L 	LED 350 mA 
Lamp wattage	1 x 36W	1 x 36W	1 x 8W
Luminous efficacy	-	-	1340 lm - 3000K
Light distribution	-	-	Wide beam 120°
Fitting	2G11	2G11	-
Light colour	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz
CRI	-	-	>90
Emergency	-	-	-
Energy efficiency class	A	A	A*
Note	Extra white frosted glass fixed with polycarbonate screws.	Extra white frosted glass fixed with polycarbonate screws.	Extra white frosted glass fixed with polycarbonate screws.

Standard: dimmable switch dim. / push trailing-edge and leading-edge (on request: dimmable 1-10V or DALI dimming (20 - 100%).




SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU

PIPEDO OPEN

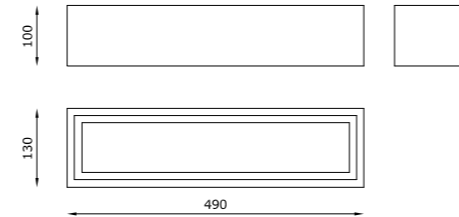

Pipedo Open is an indoor wall lamp with a clean and linear design, able to emit a general ambient light, welcoming yet non-invasive. The product becomes itself a piece of furniture: the luminaire is not hidden but becomes a protagonist, enhancing spaces. Pipedo Open is made of AirCorā] to guarantee quality and duration.

TECHNICAL FEATURES

Code	2911.AC	2912.AC	2914.EB.AC	2915.P.AC	2916.AC
Type	Wall lamp	Wall lamp	Wall lamp	Wall lamp	Wall lamp
Material	AC: AirCorā]	AC: AirCorā]	AC: AirCorā]	AC: AirCorā]	AC: AirCorā]
Absorption capacity*	10.09 m ²	10.09 m ²	10.09 m ²	10.09 m ²	10.09 m ²
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20	IP20
Insulation class	I	I	I	I	I
Control gear	-	-	Electronic ballast	Dimmable electronic ballast	Dimmable constant current driver
Lamp type	A 60	QT-DE12 (75 mm)	TC-L	TC-L	LED 350 mA
Lamp wattage	1 x 100W max	1 x 150W max	1 x 36W	1 x 36W	2 x 8W
Luminous efficacy	-	-	-	-	2 x 1340 lm - 3000K
Light distribution	-	-	-	-	Wide beam 120°
Fitting	E27	R7s	2G11	2G11	-
Light colour	-	-	-	-	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz	220-240V • 50/60Hz
CRI	-	-	-	-	>90
Emergency	-	-	-	-	-
Energy efficiency class	A*	A	A	A	A*
Note	-	-	-	Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).	Trailing-edge and leading-edge dimming (20 - 100%). Satin glass included.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2914.EB.AC / 2915.P.AC	2910	Glass safety screen	Protection IP40



SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU