




## IRIDE TRACK



### IRIDE TRACK 86S

Binario da ordinare separatamente | Track system to be ordered separately p. 480




LED W	Ø	lm product/beam 3000K			CODE	Col.
		19°	24°	40°		
18	86	1772	1832	1586	<b>IR10.9</b>	/01 /02 /21 /25 /28
26	86	2193	2252	2008	<b>IR11.9</b>	

- Kelvin
- 27 2700K
- 30 3000K
- 40 4000K
- Beam
- S 19°
- F 24°
- W 40°
- Dimmable (optional)
- D Dali

### IRIDE TRACK 114S

Binario da ordinare separatamente | Track system to be ordered separately p. 480




LED W	Ø	lm product/beam 3000K			CODE	Col.
		12°	24°	36°		
26	114	2118	2531	2108	<b>IR12.9</b>	/01 /02 /21 /25 /28
34	114	2476	2942	2596	<b>IR13.9</b>	

- Kelvin
- 27 2700K
- 30 3000K
- 40 4000K
- Beam
- S 12°
- F 24°
- W 36°
- Dimmable (optional)
- D Dali

### IRIDE TRACK 86L

Binario da ordinare separatamente | Track system to be ordered separately p. 480




LED W	Ø	lm product/beam 3000K			CODE	Col.
		19°	24°	40°		
18	86	1772	1832	1586	<b>IR14.9</b>	/01 /02 /21 /25 /28
26	86	2193	2252	2008	<b>IR15.9</b>	

- Kelvin
- 27 2700K
- 30 3000K
- 40 4000K
- Beam
- S 19°
- F 24°
- W 40°
- Dimmable (optional)
- D Dali



## IRIDE TRACK 114L

Binario da ordinare separatamente | Track system to be ordered separately p. 480



LED W	Ø	lm product/beam 3000K			CODE	Col.
		12°	24°	36°		
26	114	2118	2531	2108	IR16.9	/01 /02 /21 /25 /28
34	114	2476	2942	2596		

● Kelvin  
● Beam  
● Dimmable (optional)


27 2700K  
 30 3000K  
 40 4000K

● S 12°  
● F 24°  
● W 36°


● D Dali

Adattatore compatibile con binari One Track (A.A.G. Stucchi) o Global Track pulse (Nordic Aluminium) | Track adaptor compatible with One track (A.A.G.Stucchi) or Global Track pulse (Nordic Alluminium)

## IRIDE 86

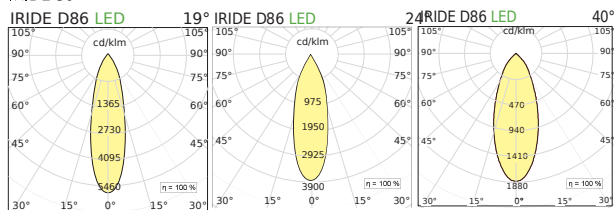

## IRIDE 114

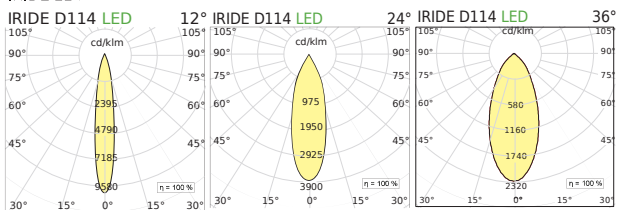

SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND  
 G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: [showroom@gineico.com](mailto:showroom@gineico.com)

[WWW.GINEICOLIGHTING.COM.AU](http://WWW.GINEICOLIGHTING.COM.AU)