


## Rocchetto Mini P IP

Wall and ceiling light for outdoor use, with IP66 degree of protection, made of aluminium with a Ø26 mm adjustable cylindrical head (360° along the vertical axis and 90° along the horizontal axis). Designed to reach 6W with CRI>90.



## Rocchetto Mini P IP

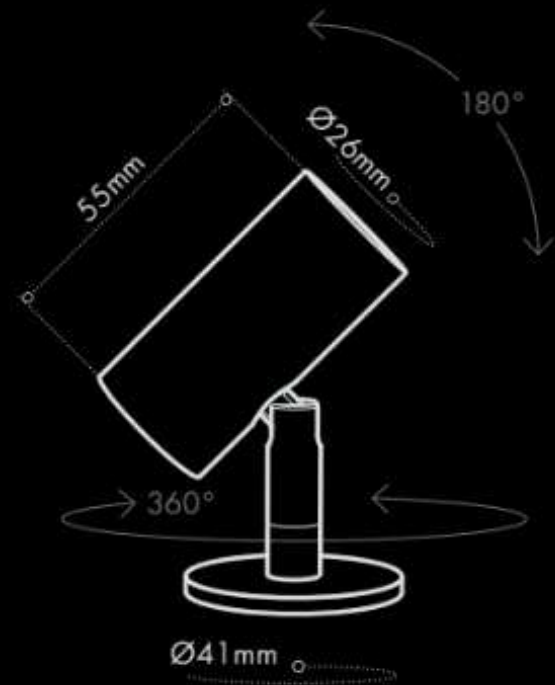

Prodotto Product	Watt Watt	Lumen Lumen	Alimentazione Supply	CRI CRI	Angolo Angle	Temperatura Colore Color Temperature
Rocchetto Mini P IP	4W	463lm	350mA	≥90	10°, 25°, 30°, 45°, 14°x48°	2700-3000-4000K
	6W	627lm	500mA	≥90	10°, 25°, 30°, 45°, 14°x48°	2700-3000-4000K



[Accessori, varianti e supplementi](#)  
[Accessories, variants and supplements](#)

Nido d'ape / Honeycomb

Connettore a crimpare IP67 / Crimp connector IP67

Connettore con gel IP68 2 vie / Gel connector IP68

Connettore lineare IP68 anticondensa / Anti-condensation linear connector IP68

Scatola giunzione 140x95x35 mm IP66, con connettori rapidi / IP66 Junction box 140x95x35 mm, with quick connectors

Finiluxa  
Finishes



10° 25° 30° 45° 14°x48°



G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: [showroom@gineico.com](mailto:showroom@gineico.com)

[WWW.GINEICOLIGHTING.COM.AU](http://WWW.GINEICOLIGHTING.COM.AU)