





USE LED FEATURES



















IP20 IK 05

220-240 V Hz


<sup>/60</sup> RG 0

## DESCRIPTION

Suspension lamp for direct non-glare lighting. Metal structure with laser-cut details. All versions have the inside of the diffuser painted white to improve light reflection. Painted metal top cover to match the color of the structure. The white version has a red cotton covered power cable, the black version has a white cotton covered power cable. Suspensions 350 and 550 have steel support ropes. Screen made of opal polycarbonate, specifically for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. DM version equipped with dimmable power supply with DALI/PUSH interface. All electronic ballasts are equipped with thermal and short-circuit protection against overloading and overvoltage.





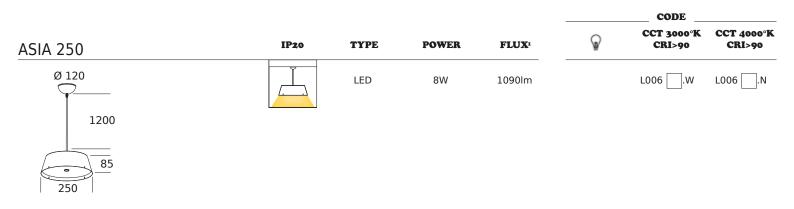

ASIA 350	IP20	ТҮРЕ	POWER	FLUX:	•	CCT 3000°K CRI>90	CCT 4000°K CRI>90
0 160 1200 1200 350		LED	15W	2070lm		L007	L007

ASIA 550	IP20	түре	POWER	FLUX <sup>1</sup>	୍ମ	CCT 3000°K CRI>90	CCT 4000°K CRI>90
Ø 160		LED LED DM	34W 34W	3550lm 3550lm		L008 .WD	L008
1200							

550

**Brightest LED versions on request** 

