


by KD Lab



USE

LED

FEATURES




Suspension lamp for direct but not glaring light. Upper structure in matt white painted metal. Base and outer ring in matt white opaque polycarbonate. Transparent polycarbonate diffuser, with opal polycarbonate film, specific for Led, which combines maximum brightness with the ability to avoid the dotted effect of Led. Metal top cover painted matt white. Steel support ropes, transparent PVC coated power cord. Rubber gasket. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. The Led circuit is self-dissipating. Electronic ballast incorporated in the top cover. DM version equipped with dimmable power supply with DALI/PUSH interface. All electronic ballasts are equipped with thermal and short-circuit protection against overvoltage and overloading.





SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
 G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA
 Phone: +61 417 950 455

Email: showroom@gineico.com
WWW.GINEICOLIGHTING.COM.AU


TAB S1

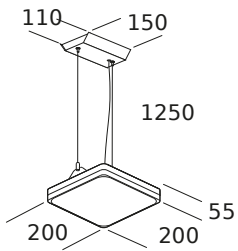



IP20	TYPE	POWER	FLUX*
	LED	14W	2200lm
	LED DM	14W	2200lm

CODE		
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L162 <input type="checkbox"/> .W	L162 <input type="checkbox"/> .N
	L162 <input type="checkbox"/> .WD	L162 <input type="checkbox"/> .ND


TAB S2





IP20	TYPE	POWER	FLUX*
	LED	28W	4400lm
	LED DM	28W	4400lm

	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L163 <input type="checkbox"/> .W	L163 <input type="checkbox"/> .N
	L163 <input type="checkbox"/> .WD	L163 <input type="checkbox"/> .ND

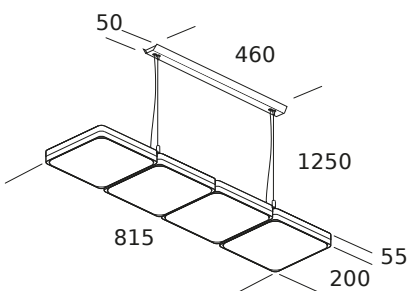TAB S4



IP20	TYPE	POWER	FLUX*
	LED	56W	8800lm
	LED DM	56W	8800lm

	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L164 <input type="checkbox"/> .W	L164 <input type="checkbox"/> .N
	L164 <input type="checkbox"/> .WD	L164 <input type="checkbox"/> .ND

