


# M1 48V




M1 48V per binario a 48V è un proiettore con tige completamente direzionabile a 360°, il quale permette di dirigere la luce in modo diretto verso singoli dettagli dello spazio. Dal design minimale, con luce spot, M1 48V è disponibile anche con ottiche differenti.

Il proiettore M1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K o 2700K (4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno del binario.

*M1 48V 48V track fitting is a projector with completely directional 360° linkage, which makes it possible to direct light in a direct way towards individual details of the space. With a minimal design, spotlight, M1 48V is also available with different optics.*

*The M1 48V projector has an LED (COB) CRI >90, 3000K or 2700K light source (4000K on request) fed in direct current with incorporated convertor located inside the track adaptor.*

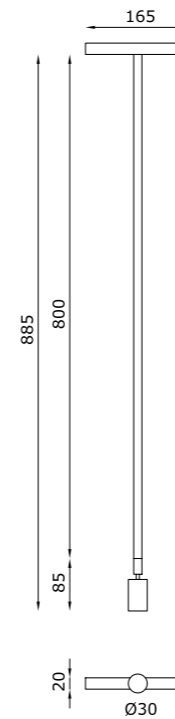

## CODE COMPOSITION

T048 L 00004		0
<i>dimmiability</i>		
<b>ND</b>	non dimmable	
<b>DA</b>	DALI	
<b>11</b>	1-10V	
<i>light colour</i>		
<b>27</b>	2700K	
<b>30</b>	3000K	
<b>40</b>	4000K	
<i>lens</i>		
<b>22</b>	22°	
<b>50</b>	50°	
<i>finishing</i>		
<b>W1</b>	white	
<b>B1</b>	black	

example of code composition

T048 L 00004 **W1 22 27 ND 0**

## TECHNICAL FEATURES

<b>Code</b>	<b>T048 L 00004 XX</b>
<b>Type</b>	Projector ± 360° / ± 90° 
<b>Material</b>	Aluminum
<b>Finishing</b>	White   Black
<b>Weight</b>	0.75 Kg
<b>Mounting</b>	Track 48V
<b>IP rating</b>	IP40
<b>Insulation class</b>	III
<b>Control gear</b>	Electronic driver on board (included)
<b>Lamp type</b>	LED 
<b>Lamp wattage</b>	1 x 6W
<b>Luminous efficacy</b>	520 lm - 3000K
<b>Light distribution</b>	Beam 22° Beam 50° (on request)
<b>Light colour</b>	White 3000K   White 2700K White 4000K (on request)
<b>Voltage connection</b>	48 VDC
<b>CRI</b>	>90
<b>Note</b>	-

