



### Description

Family of recessed and semi-recessed wall lamps, suitable for ambient illumination or as spotlight. It features a smooth and elliptical matrix, which develops around a little and simple light tube.




### General specifications

|                                              |                                                                    |
|----------------------------------------------|--------------------------------------------------------------------|
| tipo di installazione   <i>mounting type</i> | Incassato   <i>downlight</i>                                       |
| materiali   <i>materials</i>                 | alluminio, policarbonato  <br><i>aluminum, polycarbonate</i>       |
| finiture   <i>finishes</i>                   | nero opaco RAL 9005, custom  <br><i>mat black RAL 9005, custom</i> |
| dimensioni   <i>overall dimensions</i>       | 42 x 42 x 12 mm                                                    |
| foratura   <i>mounting hole</i>              | Ø33 mm                                                             |
| peso   <i>weight</i>                         | 80 gr                                                              |
| grado di protezione IP   <i>IP rating</i>    | IP40                                                               |
| fissaggio   <i>Fixing</i>                    | molle                                                              |
| note sul prodotto   <i>product notes</i>     | -                                                                  |

### Electrical specifications

|                                                    |                                   |
|----------------------------------------------------|-----------------------------------|
| gruppo di alimentazione   <i>power supply unit</i> | non incluso   <i>not included</i> |
| potenza   <i>power</i>                             | 2,5W                              |
| alimentazione   <i>power supply</i>                | 10-30Vdc                          |
| assorbimento   <i>absorption</i>                   | 0,21A@12V/0,10A@24V               |
| dimmerazione   <i>dimming</i>                      | si   <i>yes</i>                   |
| classe di isolamento   <i>insulation class</i>     | II                                |

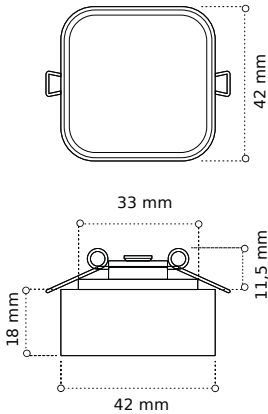


**GEA LP**

### Light source

@ 4000K, Ta = 25°, Tj = 25°

|                                                          |                     |
|----------------------------------------------------------|---------------------|
| lampada   <i>lamp</i>                                    | power LED           |
| temperatura di colore   <i>colour temperature</i>        | 2700 - 3000 - 4000K |
| indice di resa cromatica   <i>colour rendering index</i> | ≥90                 |
| flusso luminoso   <i>luminous flux</i>                   | 110lm               |
| efficienza luminosa   <i>luminous efficiency</i>         | 42,4 lm/W           |



**GEA HP**

### Optical group

|                             |                                                   |
|-----------------------------|---------------------------------------------------|
| diffusore   <i>diffuser</i> | policarbonato opalino   <i>opal polycarbonate</i> |
|-----------------------------|---------------------------------------------------|

