



GINEICO



Scheda tecnica | Data sheet
SPIGA P

Description


Indoor, ceiling-mounted lighting fixture. Consisting of body and fixing base in aluminium; satin optical polymer diffuser. The LED source with 360° emission and high color rendering is oriented horizontally. The length is defined based on the project and intended use (max length 550mm). The power supply unit can be inserted on board.

General specifications

tipo di installazione <i>mounting type</i>	a plafone <i>ceiling</i>
materiali <i>materials</i>	alluminio, PMMA <i>aluminum, PMMA</i>
finiture <i>finishes</i>	bianco opaco RAL 9010, nero opaco RAL 9005, oro, bronzo, rame, brunito, corten, ottone spazzolato, custom <i>matt white RAL 9010, matt black RAL 9005, gold, bronze, copper, burnished, corten, brushed brass, custom</i>
dimensioni <i>overall dimensions</i>	-
peso <i>weight</i>	-
grado di protezione IP <i>IP rating</i>	IP54

Electrical specifications


gruppo di alimentazione <i>power supply unit</i>	su richiesta <i>on request</i>
potenza <i>power supply</i>	36W
alimentazione <i>power supply</i>	220-240Vdc, 50/60Hz 220-240Vdc, 50/60Hz
dimmerazione <i>dimming</i>	su richiesta <i>on demand</i>
classe di isolamento <i>insulation class</i>	II



Light source

@ 4000K, Ta = 25°, Tj = 25°

lampada <i>lamp</i>	LED ad alta potenza <i>high power LED</i>
temperatura di colore <i>colour temperature</i>	2700 - 3000 - 4000K
indice di resa cromatica <i>colour rendering index</i>	≥90
vita media <i>average life</i>	35°C, 6000h
flusso luminoso <i>luminous flux</i>	2110lm

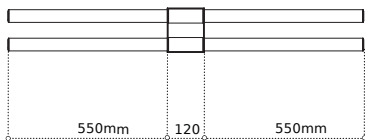

Optical group

diffusore <i>diffuser</i>	polycarbonato trasparente, PMMA parzialmente satinato <i>transparent polycarbonate, partly sandblasted PMMA</i>
-----------------------------	---

SYDNEY - MELBOURNE - GOLD COAST - PERTH - AUCKLAND
G45, 76-84 WATERWAY DRIVE COOMERA, QLD, 4209, AUSTRALIA

Phone: +61 417 950 455

Email: showroom@gineico.com

WWW.GINEICOLIGHTING.COM.AU

