


DRY

INCASSO QUADRATO,
MINIMO INGOMBRO
SQUARE RECESSED FIXTURE,
MINIMUM SPACE REQUIRED



Dry

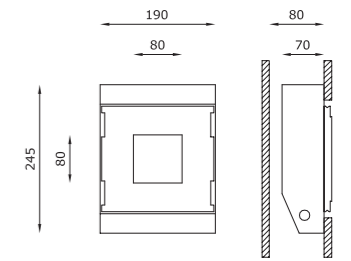

OTHER AVAILABLE CODES

6113.Z.27.AC	lens	40°
	light colour	2700K
6113.Z.40.AC	lens	40°
	light colour	4000K (on request)

TECHNICAL FEATURES

Code	6113.Z.AC	6111.AC	6112.AC
Type	Wall recessed 90°	Wall recessed 45°	Wall recessed 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	2.53 m²	2.53 m²	2.53 m²
Weight	1.5 Kg	1.5 Kg	1.5 Kg
Mounting	Wall recessed	Wall recessed	Wall recessed
IP rating	IP40	IP40	IP40
Insulation class	III	III	III
Control gear	ON/OFF driver (included)	Dimmable electronic transformer (included)	Dimmable electronic transformer (included)
Cut out for plasterboard	195 × 185 mm	195 × 185 mm	195 × 185 mm
Lamp type	LED 500 mA ⚡ VI: 11.5 VDC	QR CB 51	QR CB 51
Lamp wattage	1 × 9W	1 × 50W max	1 × 50W max
Luminous efficacy	1 × 1125 lm - 3000K	-	-
Light distribution	Wide beam 40°	-	-
Fitting	-	GU5.3	GU5.3
Light colour	White 3000K	-	-
Light hole	80 × 80 mm	80 × 80 mm	80 × 80 mm
Voltage connection	220-240V · 50/60Hz	220-240V / 12V · 50/60Hz	220-240V / 12V · 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A++	A	A
Note	Extra white satin glass fixed by clip on wall level. On request available dimmable PUSH or DALI. Other available light colours: 2700K, 4000K (on request).	Extra white satin glass fixed by clip on wall level.	Extra white satin glass fixed by clip on wall level.

OPTIONAL

Kit LED dimmable	-	cod. 0008KIT	cod. 0008KIT
------------------	---	--------------	--------------

For further info and other available drivers please see page 407

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²