


# GLOBE



INCASSO A PARETE CON FORO DI EMISSIONE DA 200 mm E PARABOLA WALL-WASHER

WALL RECESSED FIXTURE WITH 200 mm HOLE AND WALL WASHER PARABOLIC DISH

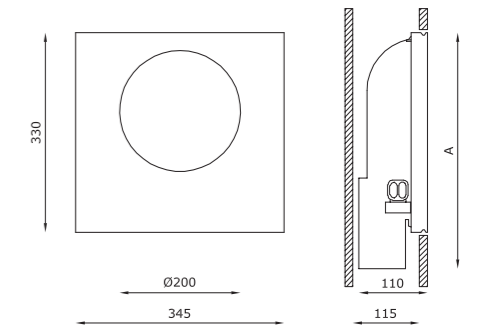

## Globe



### OTHER AVAILABLE CODES

6289.27.AC	<i>lens</i>	120°
	<i>light colour</i>	2700K

### TECHNICAL FEATURES

Code	6289.AC	6292.AC
Type	Wall-washer	Wall-washer
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	14.61 m²	14.61 m²
Weight	6 Kg	6 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Insulation class	I	I
Control gear	Dimmable constant current driver (included)	-
Dimensions	A: 330 mm	A: 330 mm
Cut out for plasterboard	350 x 340 mm	350 x 340 mm
Lamp type	LED 500 mA	QT-DE12 (75 mm)
Lamp wattage	1 x 8W	1 x 60W
Luminous efficacy	1 x 930 lm - 3000K	-
Light distribution	Wide beam 120°	-
Fitting	-	R7s
Light colour	White 3000K	-
Light hole	Ø 200 mm	Ø 200 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-
Emergency	-	-
Energy efficiency class	A+	A
Note	Trailing-edge and leading-edge dimming (20 - 100%).	-
	Other available light colours: 2700K, 4000K (on request).	

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²