IBRIDA PARETE | WALL

IBRIDA

Ibrida è una collezione di prodotti da parete o da terra che permette grande personalizzazione.
Esiste proposta in moduli finiti, ma è tramite il sistema componibile che raggiunge la sua massima espressione.Caratterizzato da un profilo di alluminio che ospita una linea led che può essere installata sia diretta che indiretta, completo di diffusore in policarbonato opalino. Possibilità di aggiungere sino a 3 proiettori Focus per una luce diretta e puntuale. IP20

Hybrid is a wall or floor lamp collection that allows great customization. It exists in default modules, but it is through the modular system that reaches its maximum expression. Characterized by an aluminum profile that houses a led line both direct and indirect, complete with opal polycarbonate diffuser. Possibility to add spotlights Focus for a direct and punctual light. IP20

LUCE INDIRETTA | INDIRECT LIGHT



LUCE SPOT DIRETTA | DIRECT SPOT LIGHT

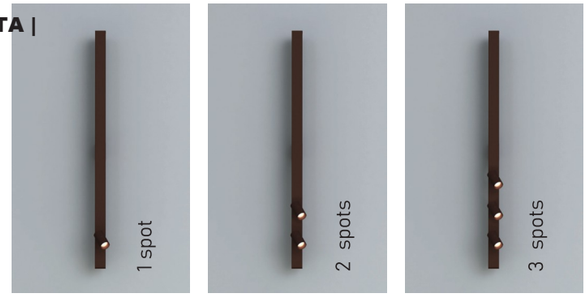

LUCE DIRETTA E INDIRETTA | DIRECT AND INDIRECT LIGHT

/##FINITURA | FINISHING

- **/01** bianco | white
- **/02** nero | black
- **/49** bronzo | bronze

/ ## FINITURA PREMIUM | PREMIUM FINISHING

- **/81** oro rosa | rose gold
- **/82** bronzo anticato | antique bronze
- **/83** ottone brunito spazzolato/brushed burnished brass

LUCE INDIRETTA | INDIRECT LIGHT



LED W	L mm	Wmm	Hmm	lm product/beam 3000K	CODE
4,5	40	126	450	386	**IB020.9 ●/##**

LED W	L mm	Pmm	Hmm	lm product/beam 3000K	CODE
9	40	126	900	835	**IB021.9 ●/##**

LED W	L mm	Pmm	Hmm	lm product/beam 3000K	CODE
17	40	126	1800	1590	**IB022.9 ●/##**

LUCE SPOT DIRETTA | DIRECT SPOT LIGHT

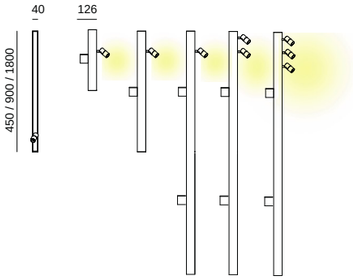

LED W	L mm	Pmm	H mm	lm product/beam 3000K S19°	F28°	Z18°x38°	CODE
1 x 8	40	126	450	665	695	508	**IB023.9 ●●/##**

LED W	L mm	Pmm	H mm	lm product/beam 3000K S19°	F28°	Z18°x38°	CODE
1 x 8	40	126	900	665	695	508	**IB024.9 ●●/##**

LED W	L mm	Pmm	H mm	lm product/beam 3000K S19°	F28°	Z18°x38°	CODE
1 x 8	40	126	1800	665	695	508	**IB025.9 ●●/##**
2 x 8	40	126	1800	1330	1390	1016	**IB026.9 ●●/##**
3 x 8	40	126	1800	1995	2085	1524	**IB027.9 ●●/##**

Accessori - accessories: IB100: Modulo comandi + Command module

LUCE DIRETTA E INDIRETTA | DIRECT AND INDIRECT LIGHT



LED W	ø	H	lm product/beam 3000K S19°	F28°	Z18°x38°	CODE
4,5 indirect + 1 spot x 8 direct	36	450	386 665	695	508	**IB028.9 ●●/##**

LED W	ø	H	lm product/beam 3000K S19°	F28°	Z18°x38°	CODE
9 indirect 1 spot x 8 direct	36	900	835 665	695	508	**IB029.9 ●●/##**

LED W	ø	H	lm product/beam 3000K S19°	F28°	Z18°x38°	CODE
17 indirect + 1 spot x 8 direct	36	1800	1590 665	695	508	**IB031.9 ●●/##**
17 indirect + 2 spots 16 direct	36	1800	1590 1330	1390	1016	**IB032.9 ●●/##**
17 indirect + 3 spots x 24 direct	36	1800	1590 1995	2085	1524	**IB033.9 ●●/##**

Accessori - accessories: IB100: Modulo comandi + Command module

ACCESSORI / ACCESSORIES

MODULO COMANDI | COMMAND MODULE **accensione/dimmerazione |** switch on/off & dimmable

CODE
IB100 /##

VERSIONI DISPONIBILI/AVAILABLE VERSION

● KELVIN
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

● FASCIO/BEAM
- **S** Spot
- **F** Flood
- **Z** Asymmetric

Per i gradi vedere in tabella - For degree check the table

● DIMMABLE (OPTIONAL)
- **D** Dali

COMPOSIZIONE CODICE: ●●/##
HOW TO CREATE THE CODE: **F1000.827SD/01**

CODE **F1000.8** — finishing **/##**
base code | kelvin | beam | dimmable